




**752MFRMHW**  
**3/8 Drive, 5-75 Ft. Lb. Micro-Adjustable Torque Wrench**





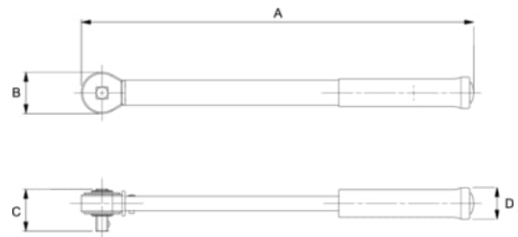

**PRODUCT DETAILS**

- Dual scale, calibrated clockwise only
- Positive lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read laser marked scales
- 1/4", 3/8", 1/2" drive feature quick release buttons which provide good socket retention as well as easy socket retention
- Accuracy:  $\pm 3\%$  CW of indicated value, CW from 20% to 100% of full scale
- Meets or exceeds ASME standards, ISO 6789 standards
- Individually serialized with matching certificate of calibration traceable to N.I.S.T



PRODUCT ATTRIBUTES

Product: **752MFRMHW**

	0.5 in·oz		0,7 lb·in		
	5-75 lb·ft		10.2-98.3 Nm		2.5 lb
	3/8 in	<b>A</b>	16 in	<b>B</b>	1.43 in
<b>C</b>	1.2 in	<b>D</b>	1.4 in		