


# data sheet: K8100

Kroepelin GmbH  
 Gartenstraße 50  
 D-36381 Schlüchtern

Tel.: 06661 86 0  
 Fax: 06661 86 39  
 Mail: sales@kroepelin.com  
 Web: www.kroepelin.com

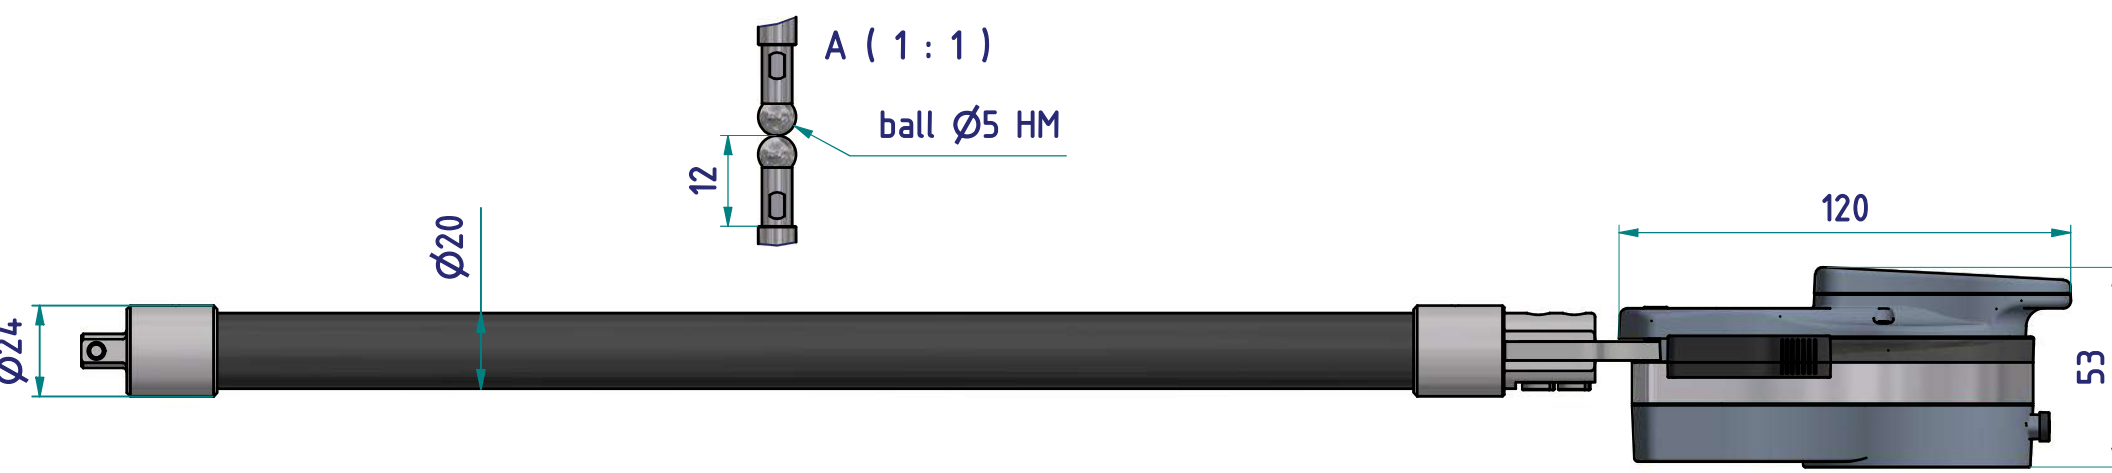


subject to technical alterations

type:	K
range:	0 - 100 mm
range of indication:	0 - 101 mm
digital step:	0,05 mm
scale interval:	-
measuring force:	0,8 - 1,8 N
weight:	660 g

acceptable deviations VDI/VDE/DGQ 2618 Bl. 12.1/13.1)	
max. permissible errors "G":	0,15 mm
repeatability "r":	0,1 mm
reference temperature:	20° C
operation temperature:	10° C - 30° C
storage temperature:	-10° C - 50° C

scale:	1:2
drawing-nr.:	DAB-K8100-K-e
date of issue:	05.03.2021
name:	B. Schmidt
revision status:	
revision date:	

interface as accessories available:

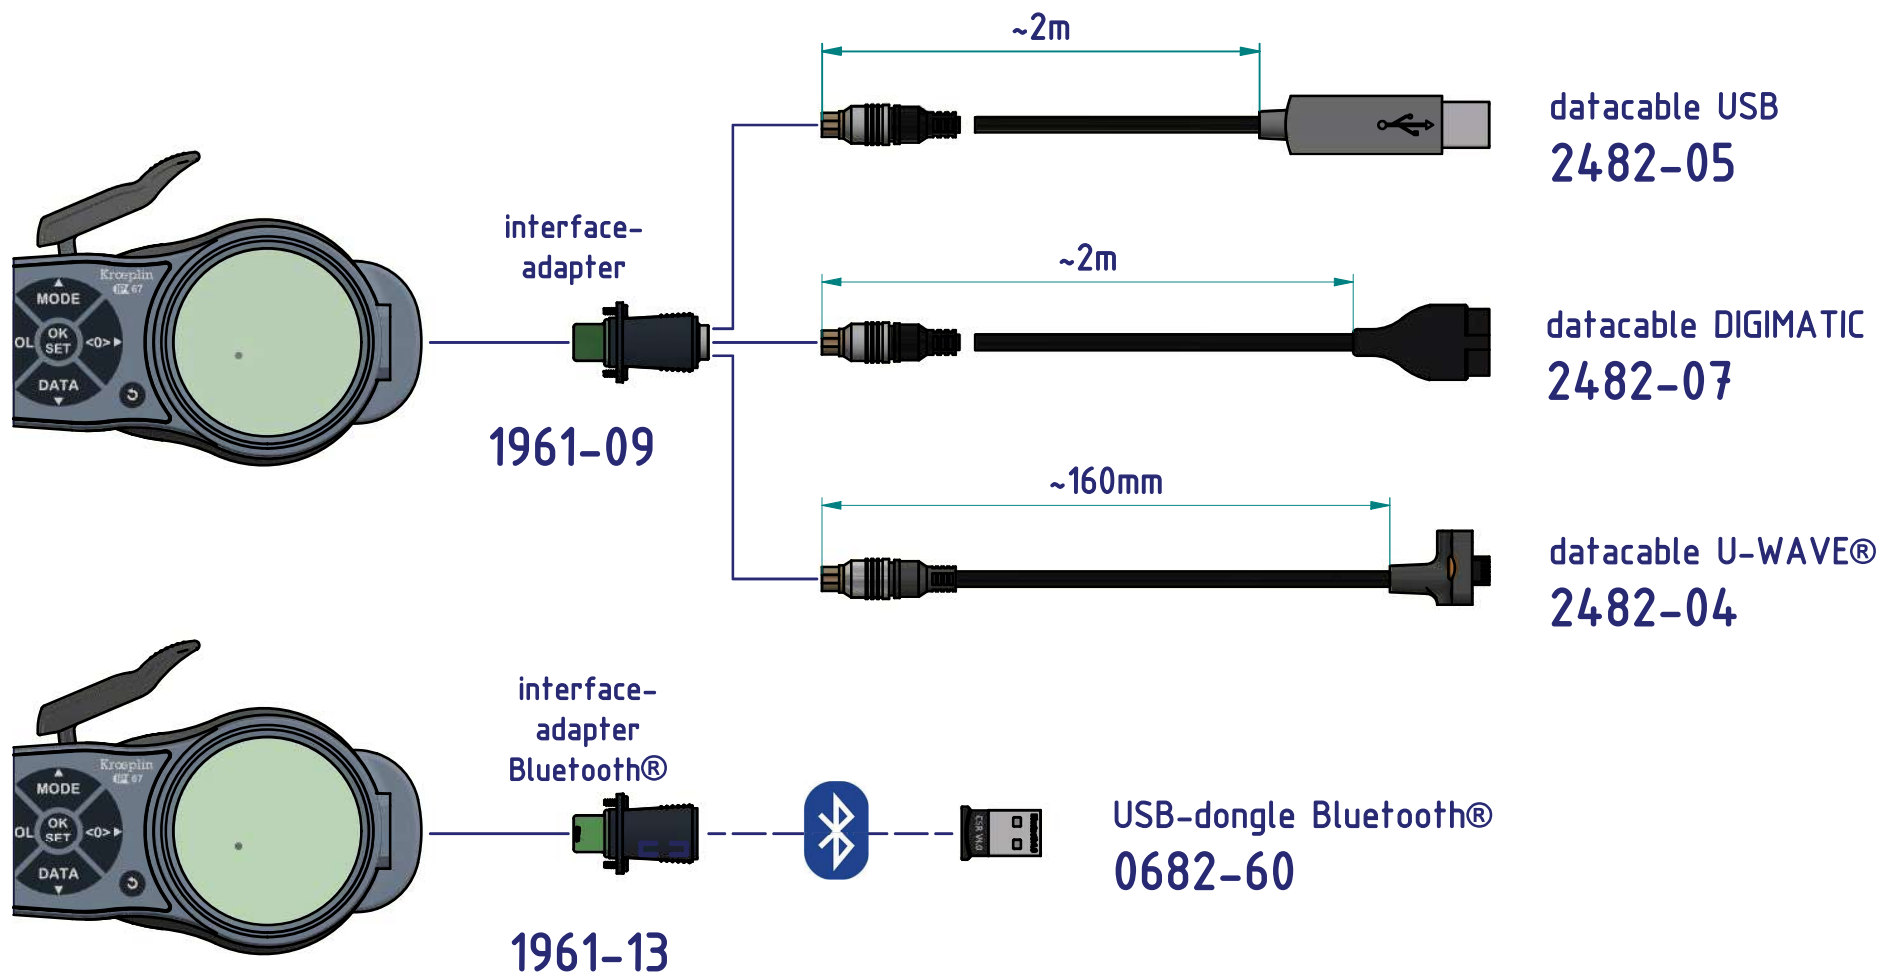

subject to technical alterations

drawing-nr.:	DAB-K8100-K-e
date of issue:	05.03.2021
name:	B. Schmidt
revision status:	
revision date:	