

subject to technical alterations


type: K  
 range: 0 - 100 mm  
 range of indication: 0 - 101 mm  
 digital step: 0,05 mm  
 scale interval: -  
 measuring force: 0,8 - 1,8 N  
 weight: 660 g

acceptable deviations  
 VDI/VDE/DGQ 2618 Bl. 12.1/13.1  
 max. permissible  
 errors "G": 0,15 mm  
 repeatability "r": 0,1 mm  
 reference temperature: 20° C  
 operation temperature: 10° C - 30° C  
 storage temperature: -10° C - 50° C

scale: 1:2  
 drawing-nr.: DAB-K8R100-K-e  
 date of issue: 05.03.2021  
 name: B. Schmidt

revision status:  
 revision date:

interface as accessories available:

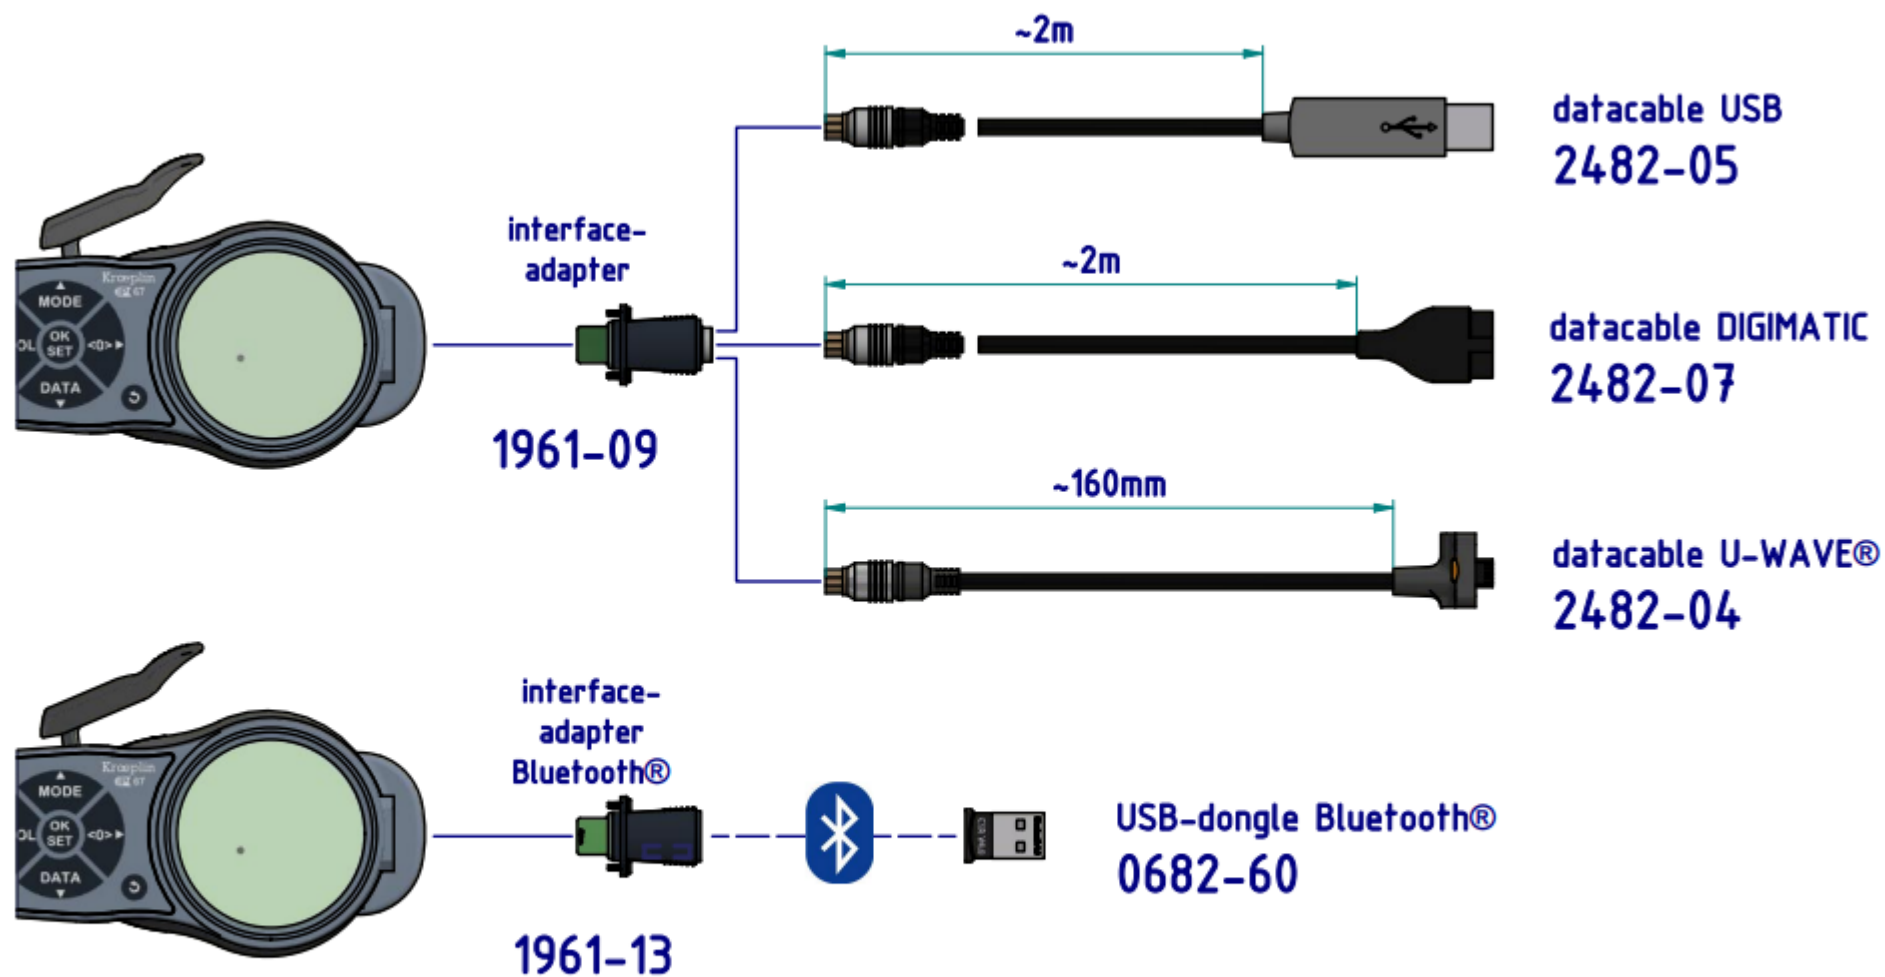

subject to technical alterations

drawing-nr.: DAB-K8R100-K-e  
date of issue: 05.03.2021  
name: B. Schmidt

revision status:  
revision date: